


REVISIONS / ISSUED TO				
NO.	DESCRIPTION	DATE	BY	RY
1	ISSUED FOR 75% COORDINATION	2024-01-25	RY	
2	ISSUED FOR PRICING/CLIENT REVIEW	2024-01-26	RY	
3	RE-REVIEW FOR PRICING/CLIENT REVIEW	2024-06-24	RY	

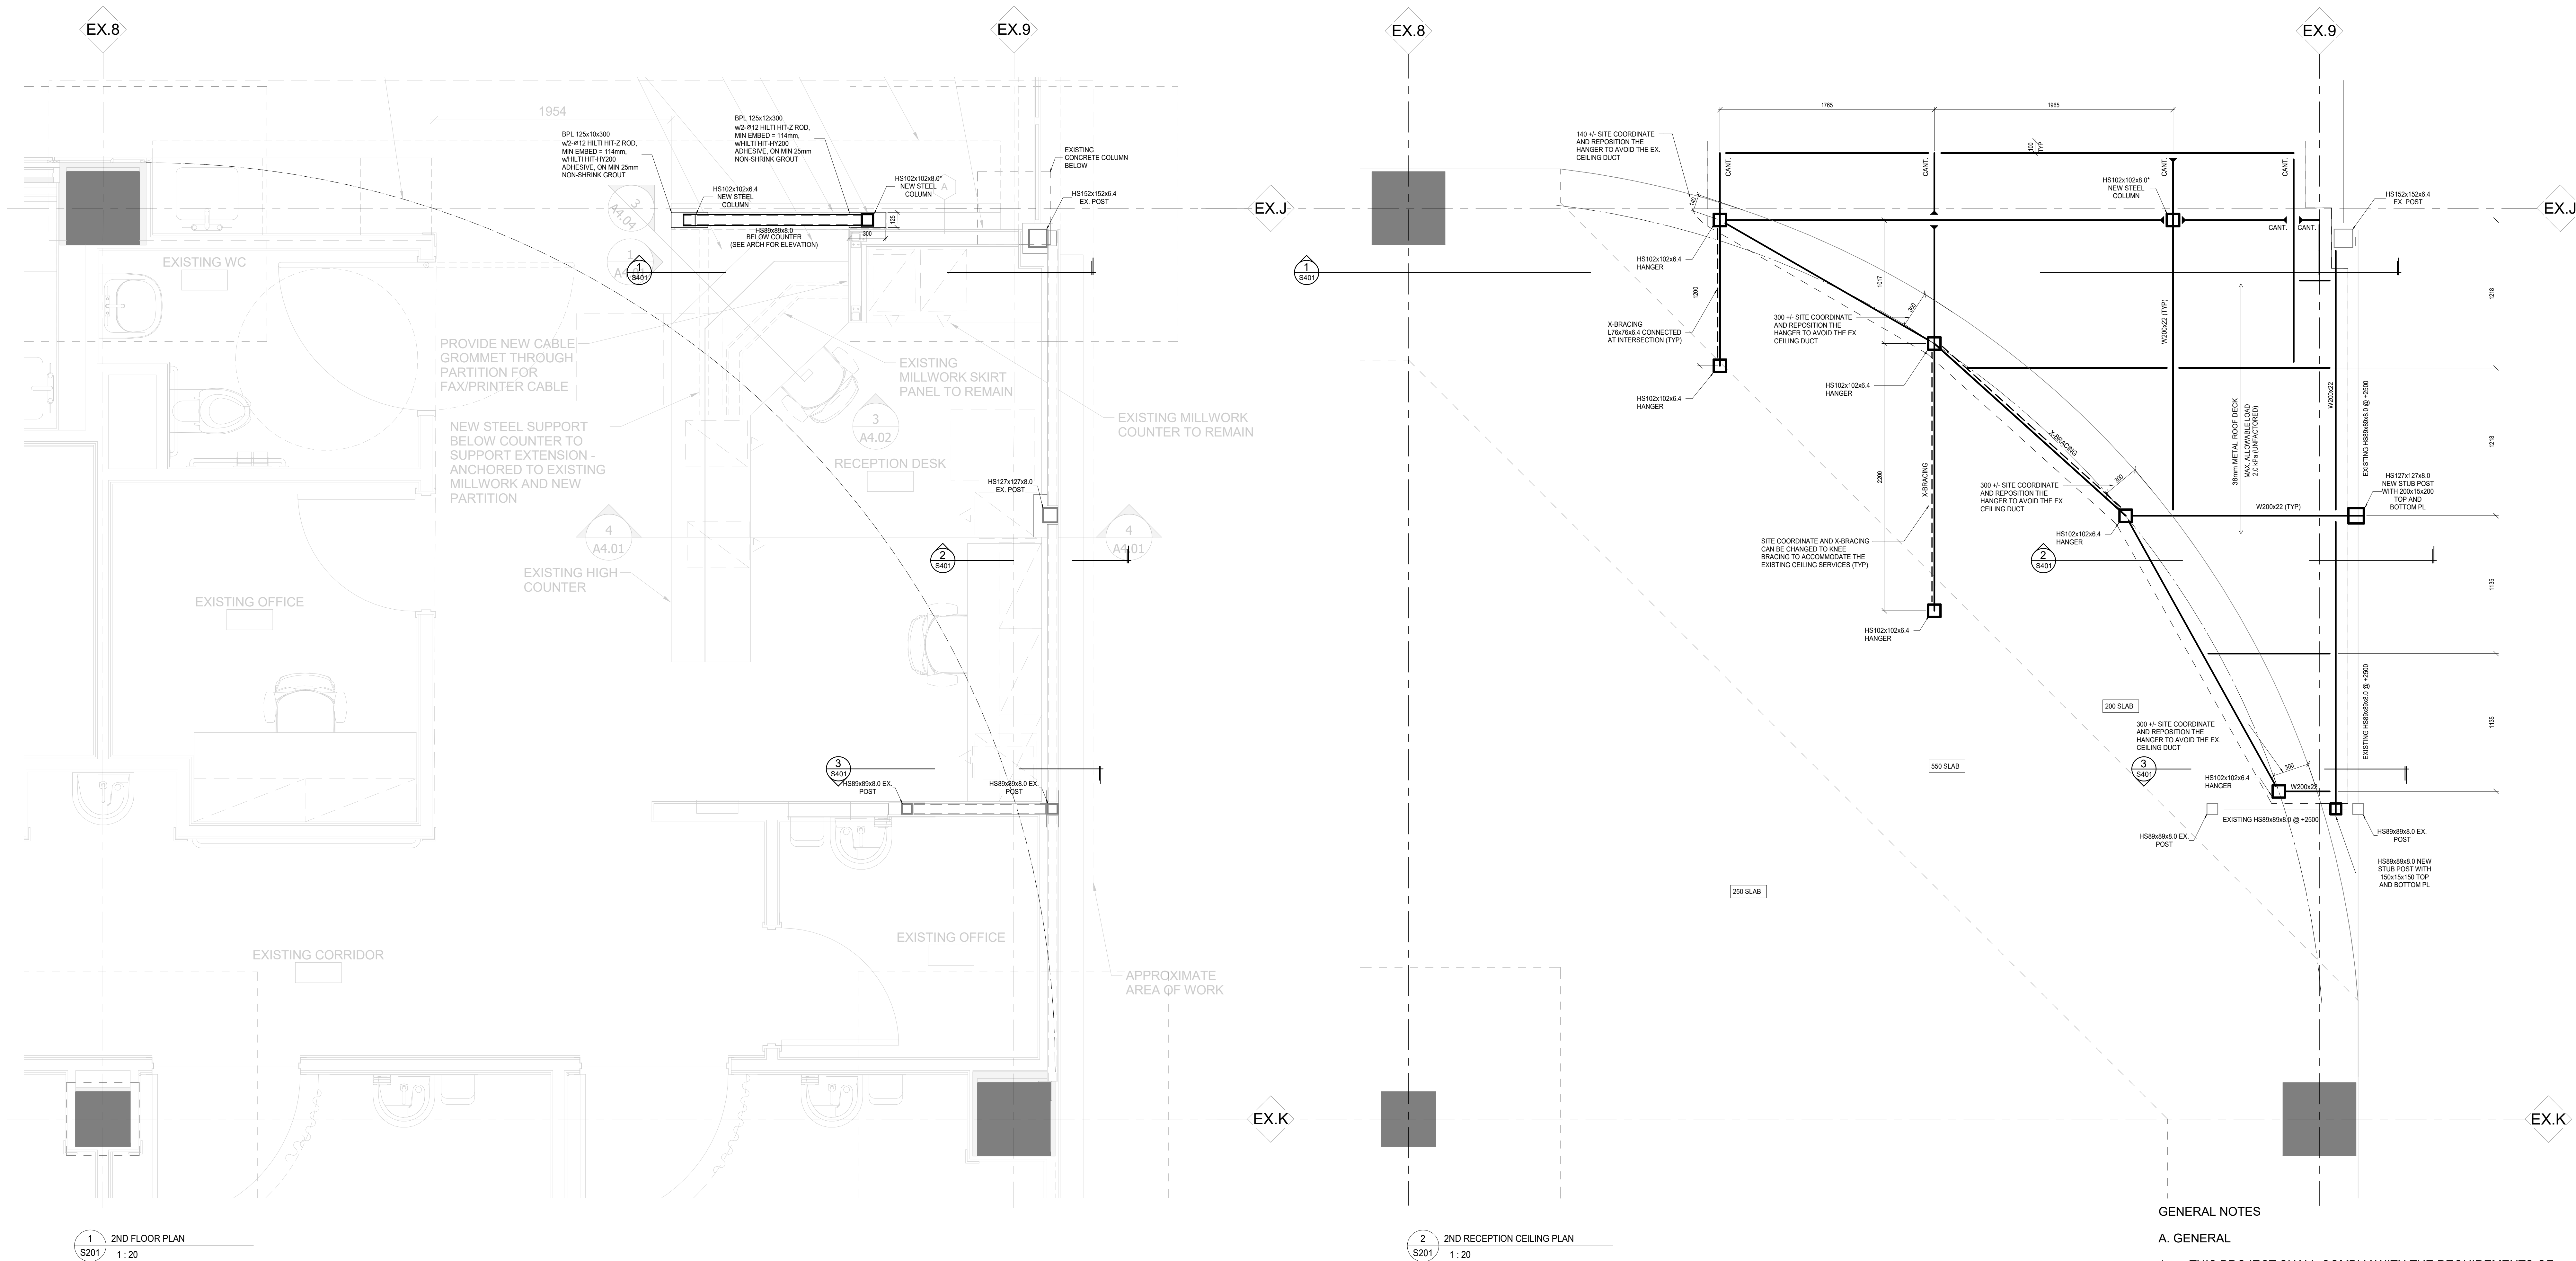

GENERAL NOTES

A. GENERAL

- THIS PROJECT SHALL COMPLY WITH THE REQUIREMENTS OF THE ONTARIO BUILDING CODE, LATEST EDITION, AND ALL AUTHORITIES HAVING JURISDICTION.
- THE STRUCTURAL DRAWINGS SHALL BE READ WITH OTHER CONTRACT DOCUMENTS. REFER TO ARCHITECTURAL DRAWINGS FOR FIRE SEPARATION REQUIREMENTS.
- ONLY DIMENSIONS RELEVANT TO STRUCTURAL ELEMENTS ARE SHOWN ON STRUCTURAL DRAWINGS. FOR OTHER DIMENSIONS AND LOCATIONS, SIZES NOT SHOWN, REFER TO THE OTHER CONTRACT DRAWINGS. HOWEVER, OBTAIN THE ARCHITECT'S PRIOR APPROVAL BEFORE INSTALLING.
- VERIFY ALL ELEVATIONS AND DIMENSIONS WITH ARCHITECTURAL DRAWINGS.
- INSTALL ONE LAYER OF 3/4" THK STRUCTO-CRETE STRUCTURAL PANELS T&G (OR EQUIVALENT PRODUCT) ON TOP OF 1 1/2" DECK.

B. STRUCTURAL STEEL

- STRUCTURAL STEEL SHALL BE NEW STRUCTURAL CARBON STEEL CSA G40.21 GRADE 300W, 300T FOR PLATES 40mm TO 100mm THICK, 350W FOR HSS, 350W FOR PLATES AS INDICATED. DESIGN AND PERFORM WELDING IN ACCORDANCE WITH CSA W59.1.
- PROVIDE DECK CLOSURE PLATES AT ALL EDGES.
- PROVIDE STEEL SHOP DRAWINGS FOR ENGINEERS AND ARCHITECTS REVIEW PRIOR TO FABRICATION.
- *** DENOTES SITE INVESTIGATE IF THERE IS ANY INTERFERING WITH EXISTING HSS POST.
- REMOVE EXISTING TOPPING ANCHOR POST BASE PLATES TO STRUCTURAL SLAB.

C. DESIGN CRITERIA


- ALL STRUCTURAL STEEL MEMBERS HAVE BEEN DESIGNED BY THE "LIMIT STATES DESIGN" METHOD IN ACCORDANCE WITH NBC 2015 AND THE ONTARIO BUILDING CODE.


D. EXISTING STRUCTURE

- CONNECTIONS TO THE EXISTING STRUCTURE:
 - THE CONTRACTOR SHALL INSPECT THE EXISTING STRUCTURE AND BECOME THOROUGHLY FAMILIAR WITH THE EXISTING CONDITIONS.
 - SHORE EXISTING WORK AS REQUIRED UNTIL ALL NEW WORK HAS BEEN COMPLETED AND REVIEWED BY THE CONSULTANT.
 - DO NOT CUT CONCRETE REINFORCEMENT UNLESS REVIEWED AND APPROVED BY THE CONSULTANT.
 - MAKE GOOD THE EXISTING WORK.


NOTE:
X-RAY OR REBAR SCAN EXISTING CONCRETE SLABS, BEAMS AND COLUMNS TO LOCATE EXISTING REINFORCING STEEL, STIRRUPS, TIES, AND CONDUITS. DO NOT DRILL THROUGH ANY EXISTING REINFORCEMENT AND DO NOT CUT ANY EXISTING CONDUITS.

ALL EXISTING INFORMATION SHOWN ON DRAWINGS IS TRANSFERRED FROM EXISTING BASE BUILDING DRAWINGS. CONTRACTOR SHALL BE RESPONSIBLE TO SITE VERIFY THE ACCURACY OF THESE DOCUMENTS WITH AS-BUILT CONDITIONS. ALL DETERMINATION OF EXISTING CONDITIONS MUST BE MADE PRIOR TO ANY STRUCTURAL DEMOLITION.

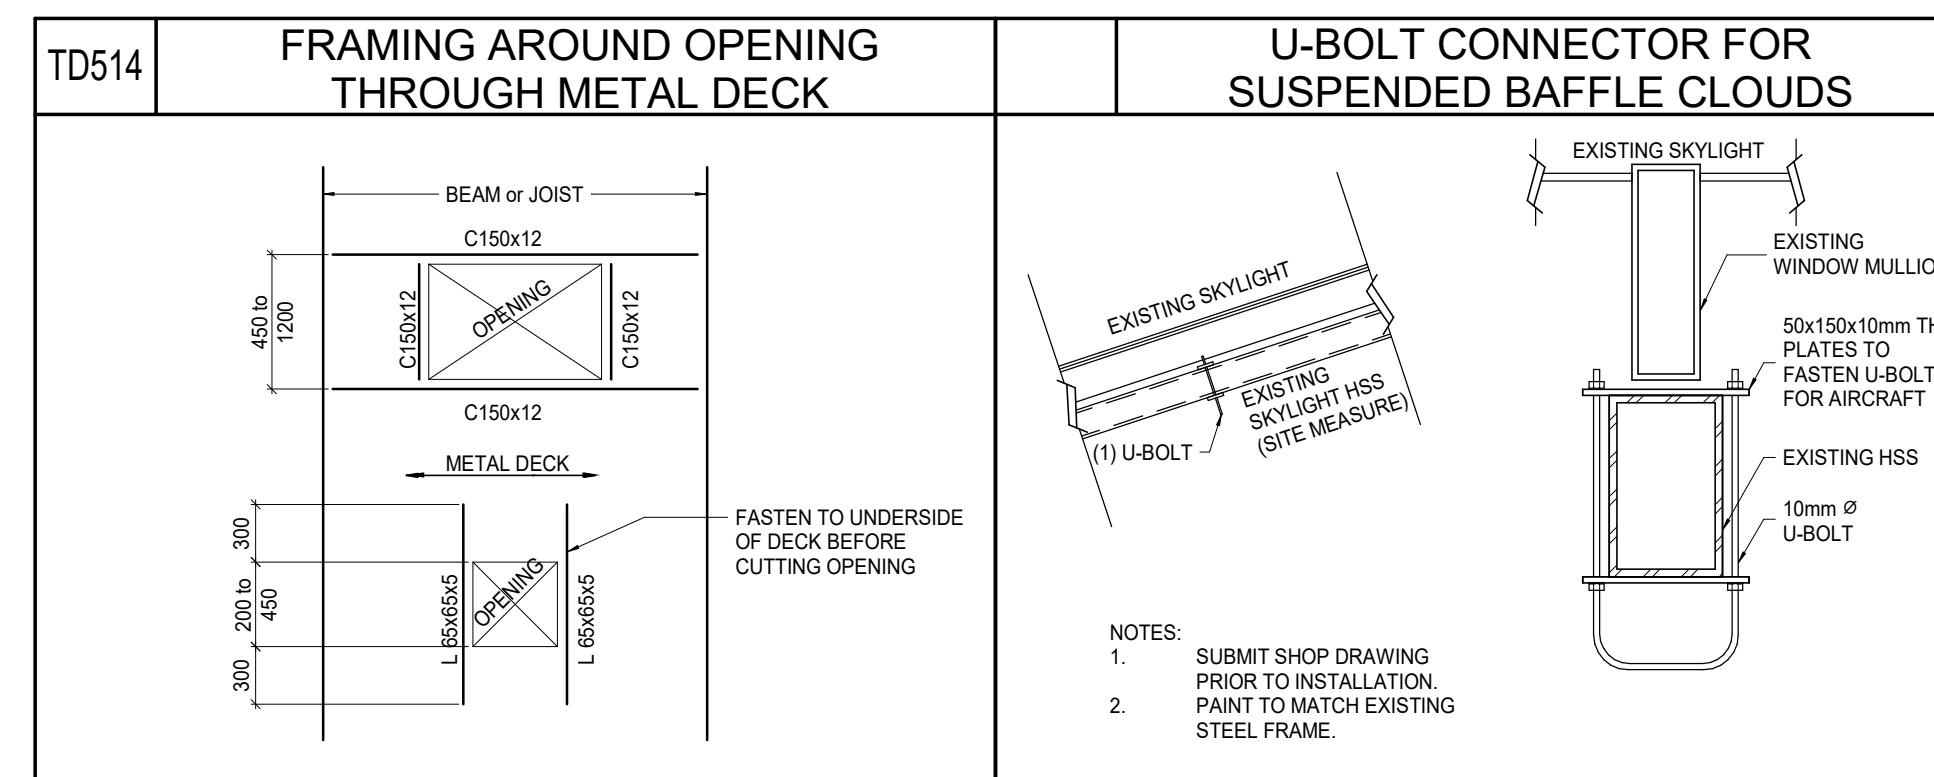


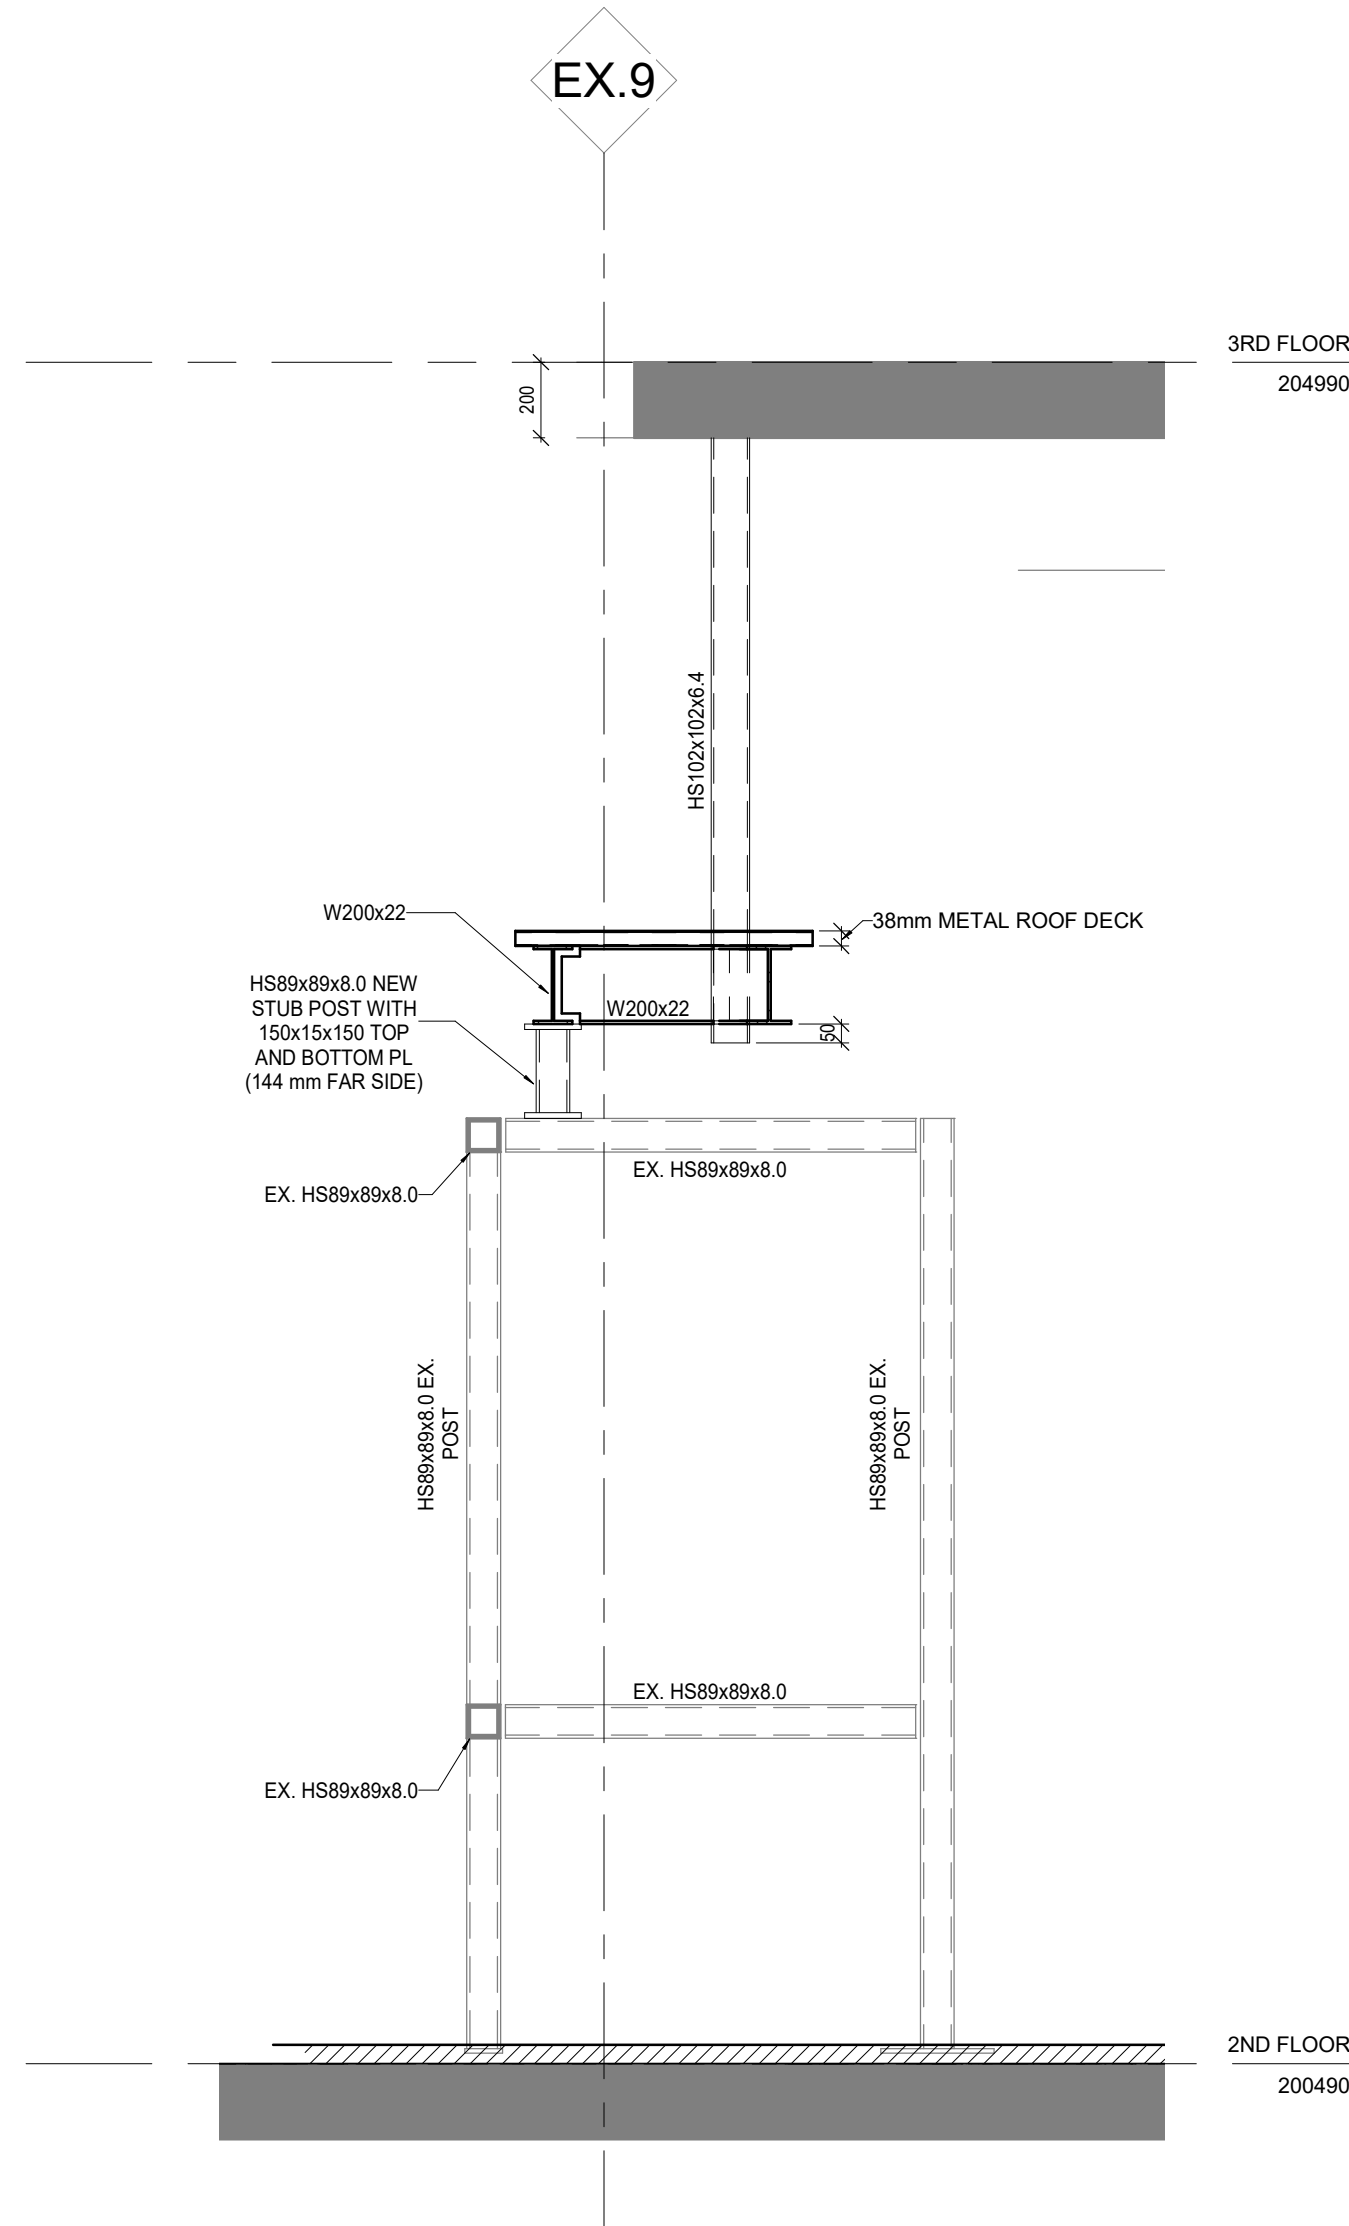


3 SECTION
S401/ 1:20

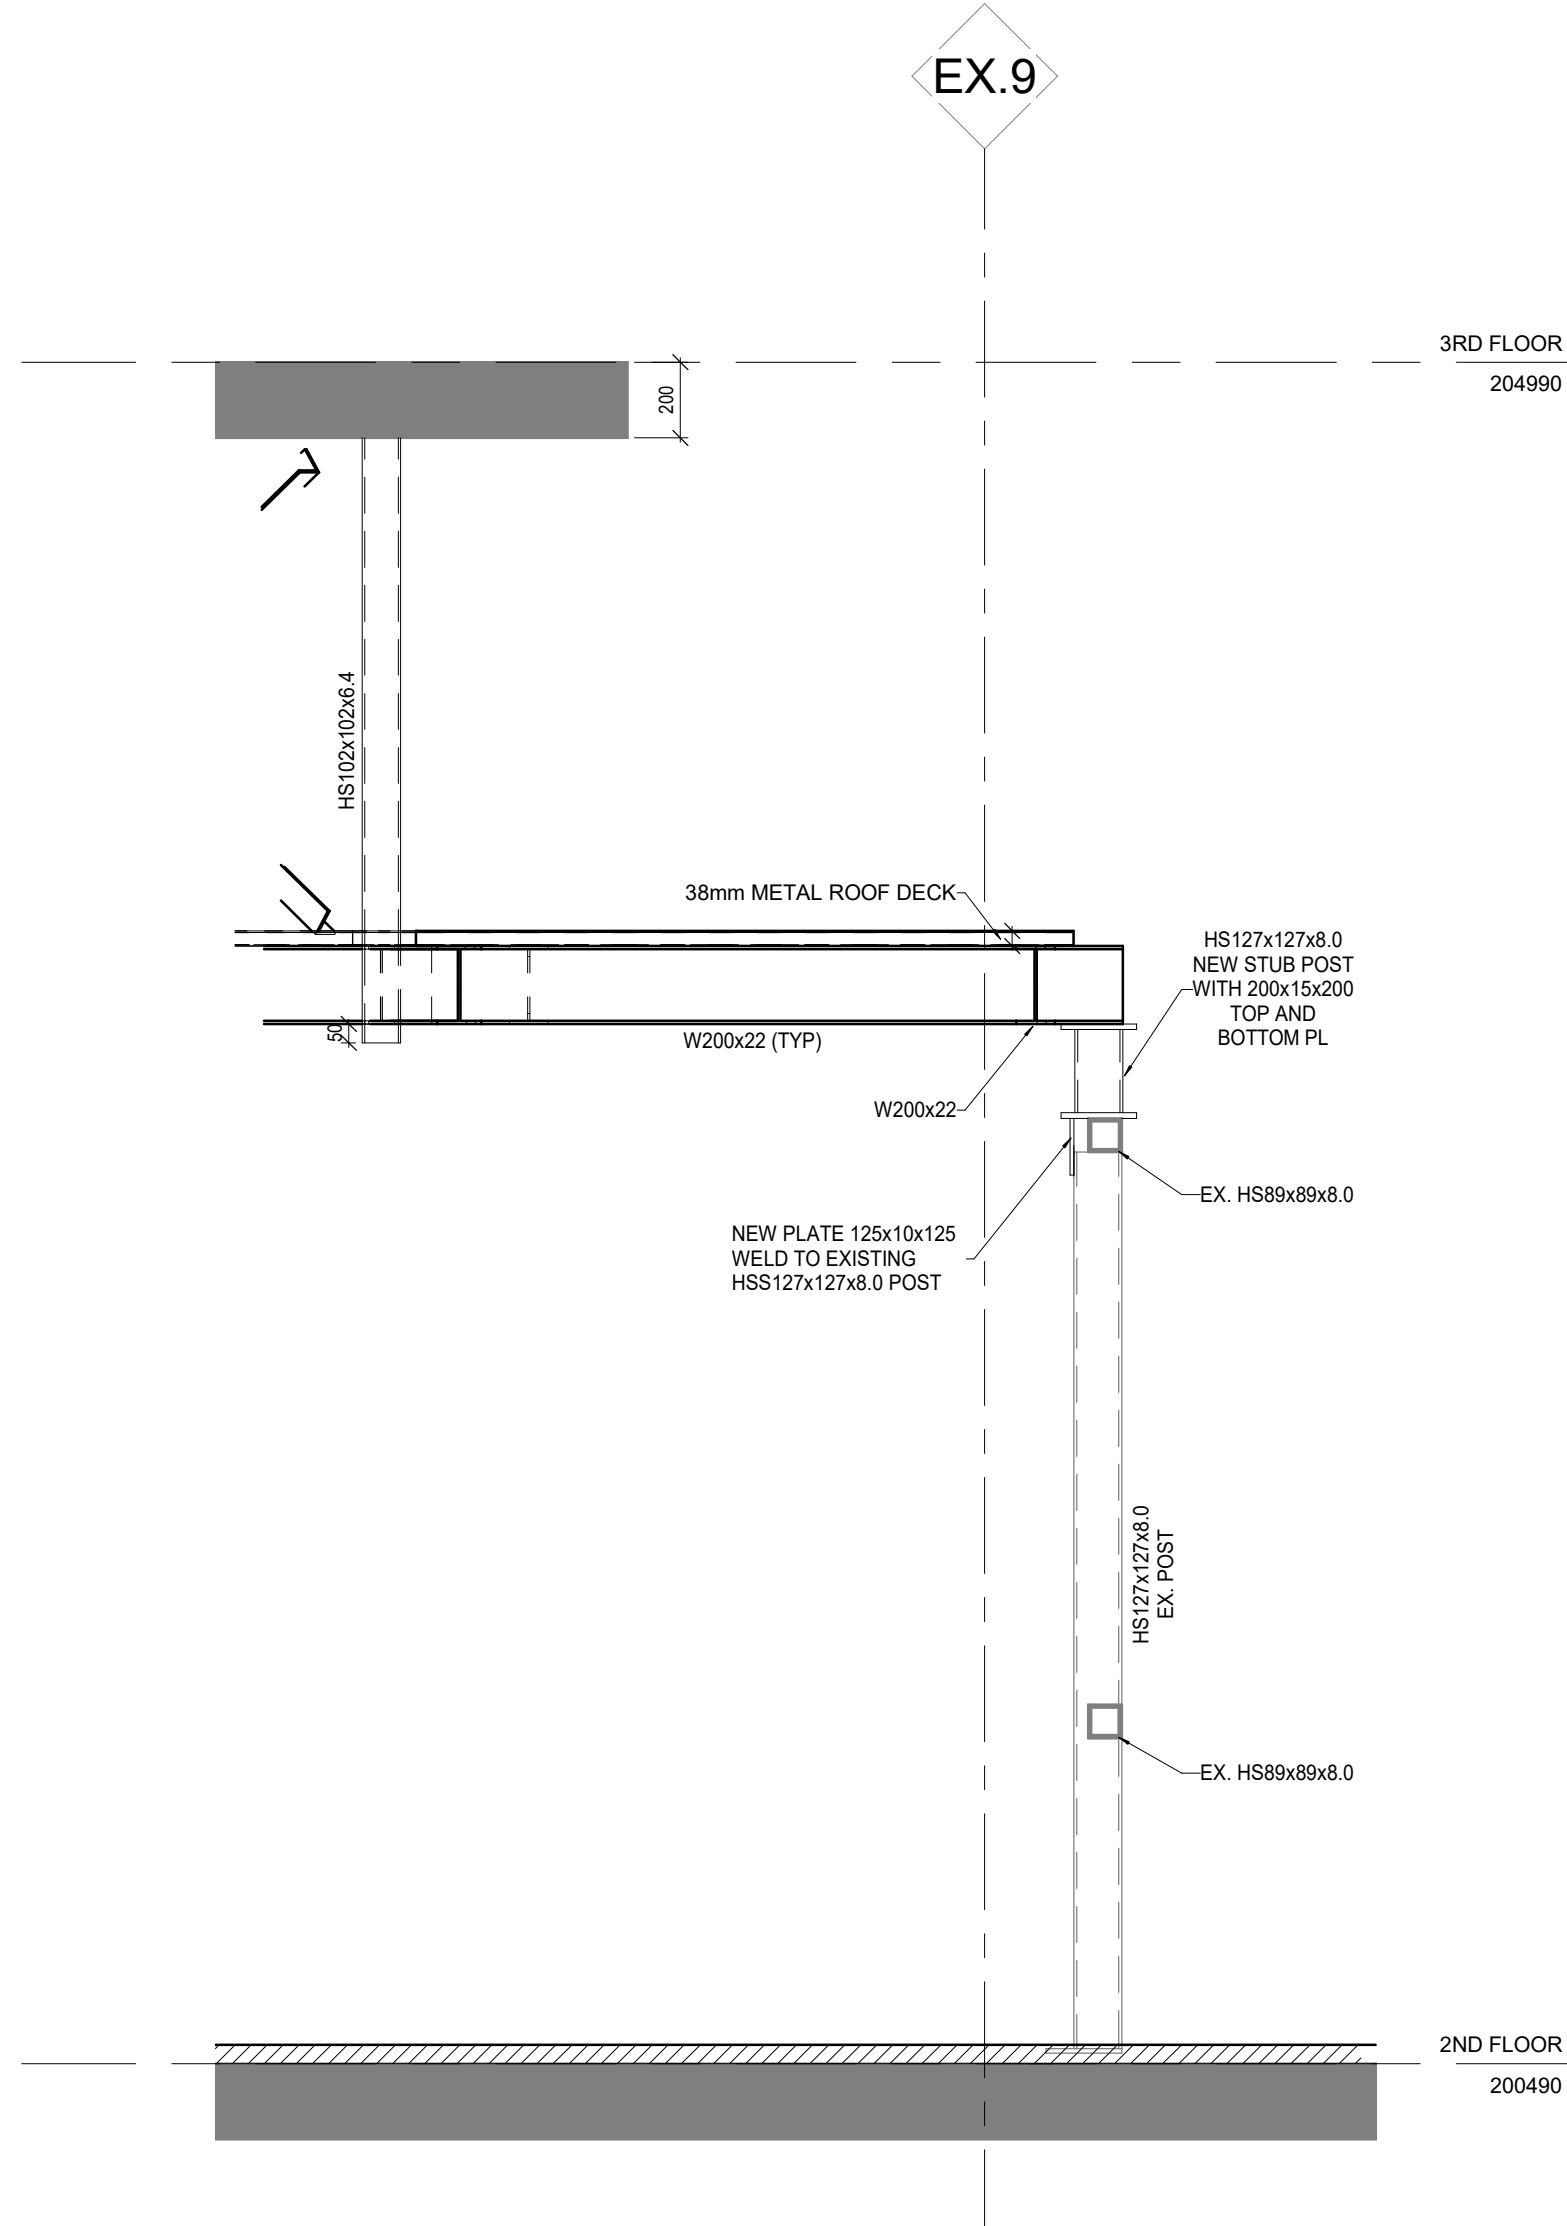

2 SECTION
S401/ 1:20

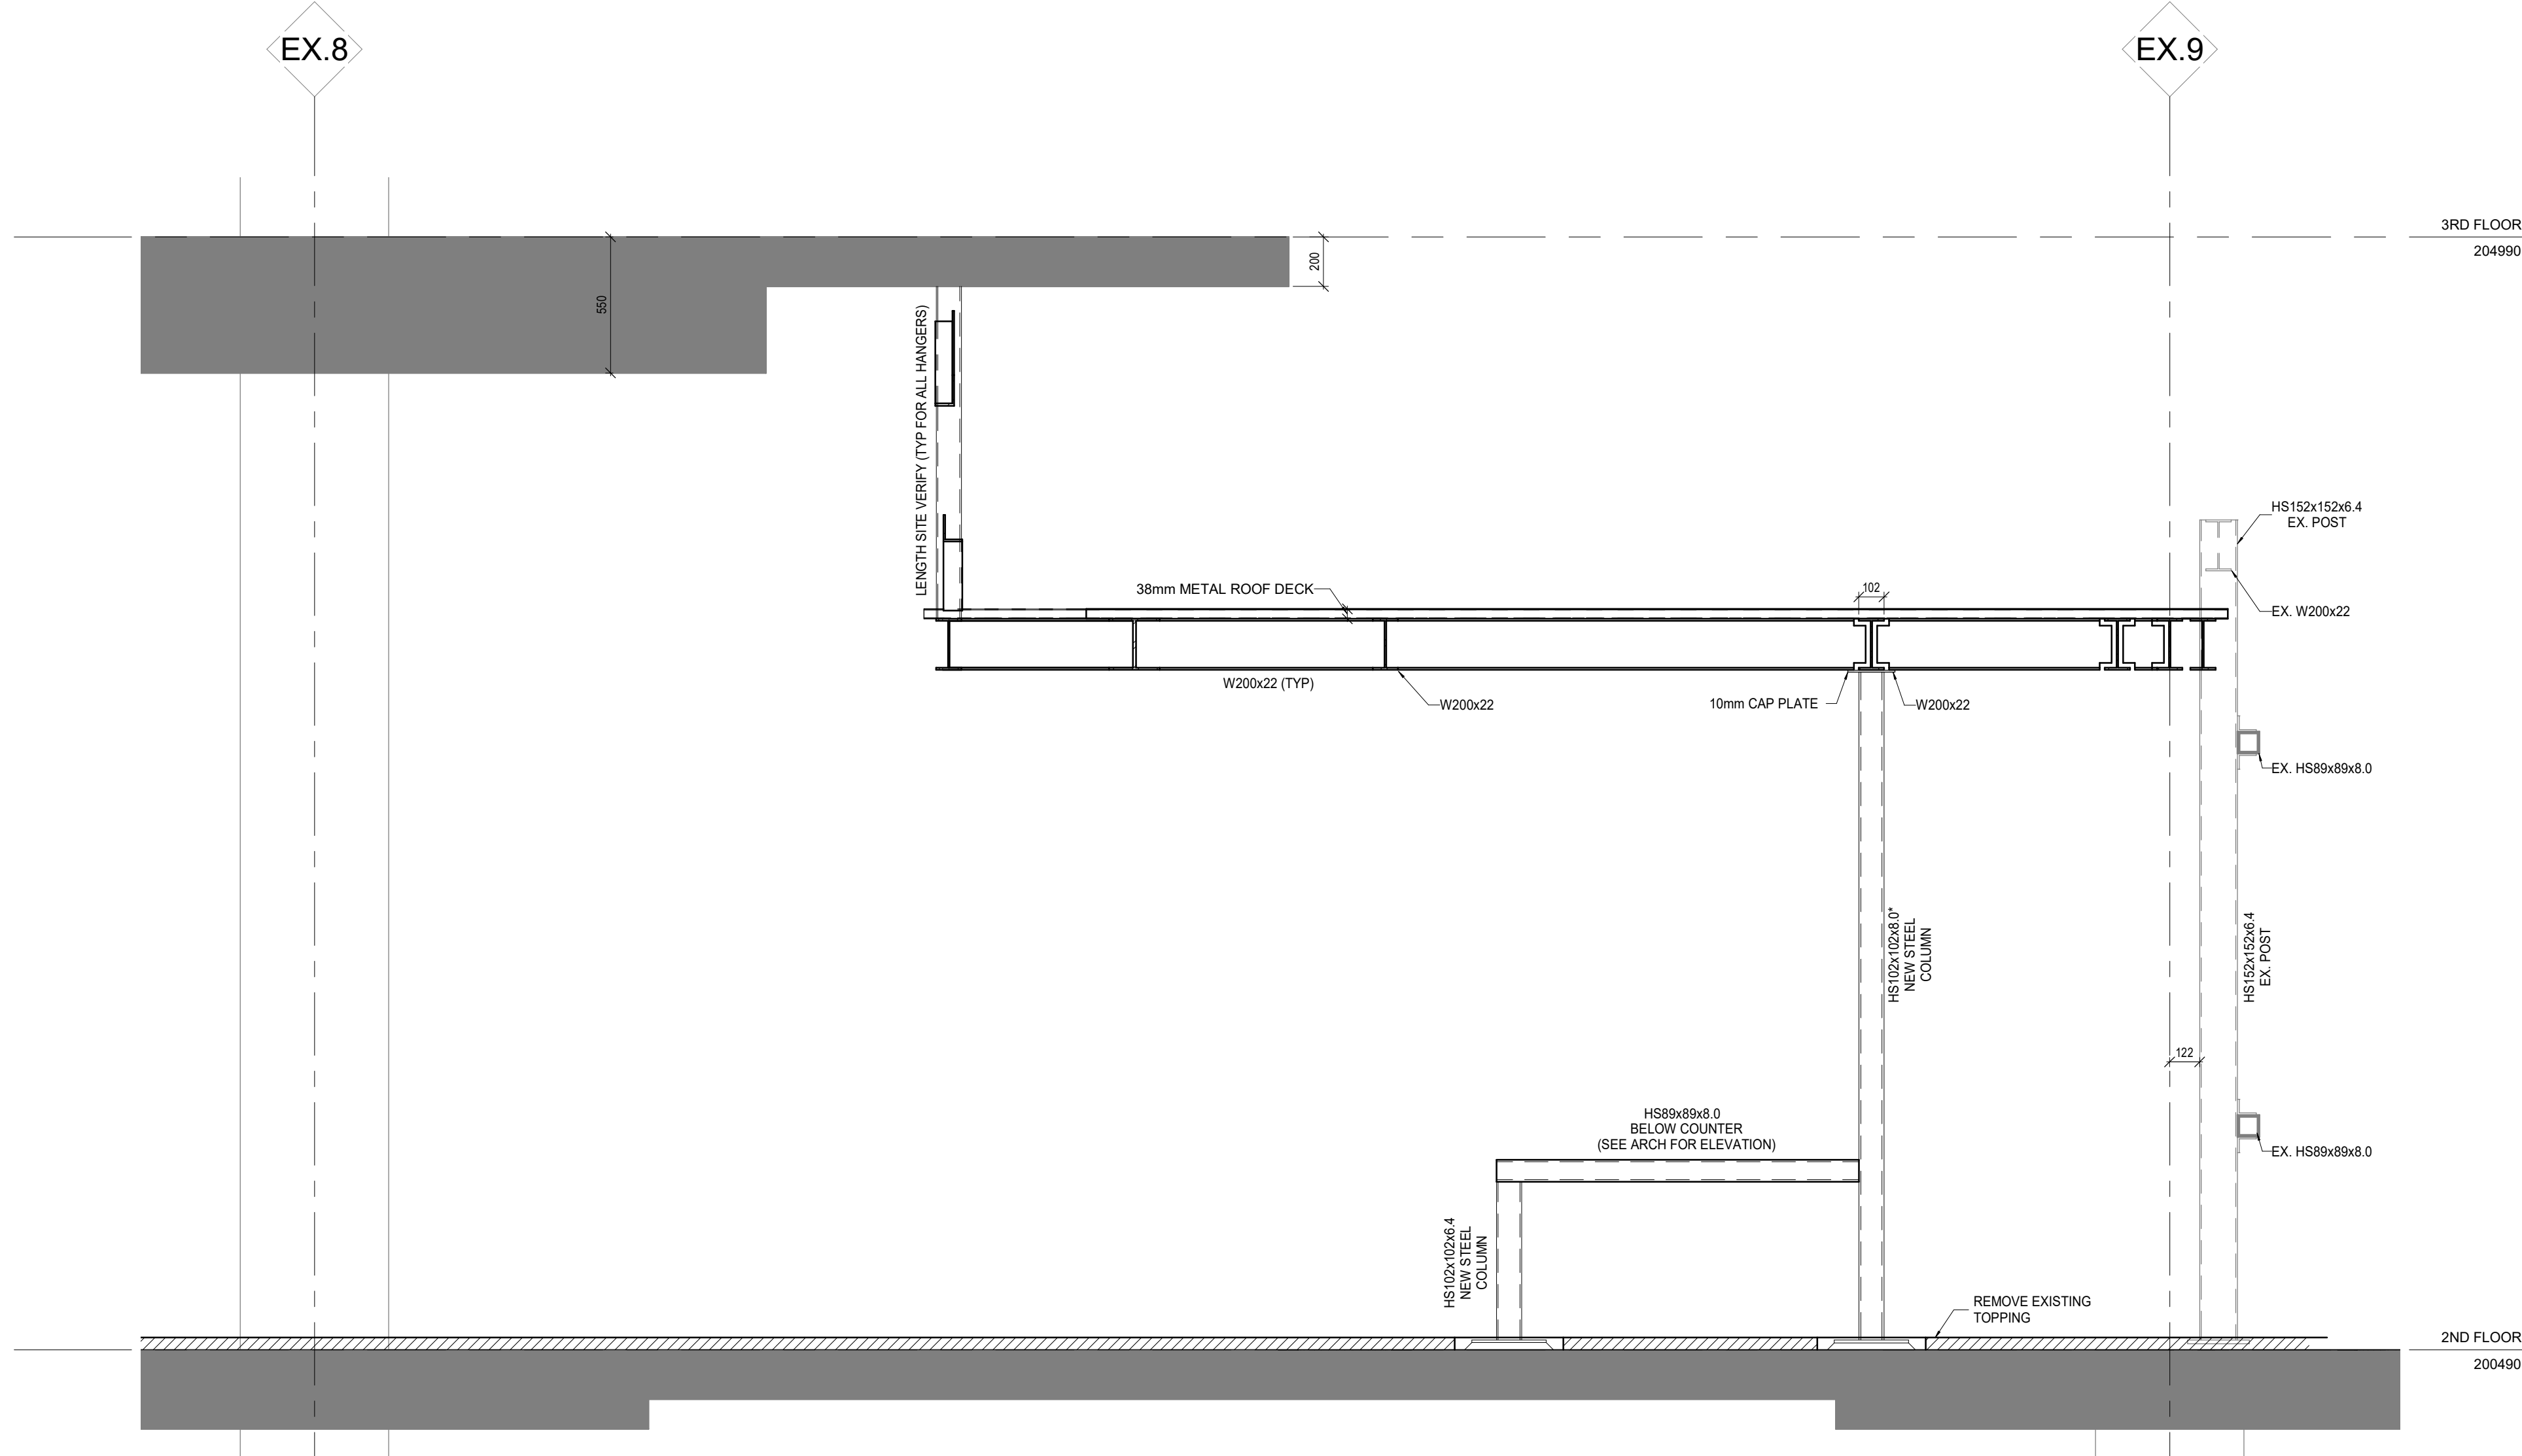

1 SECTION
S401/ 1:20

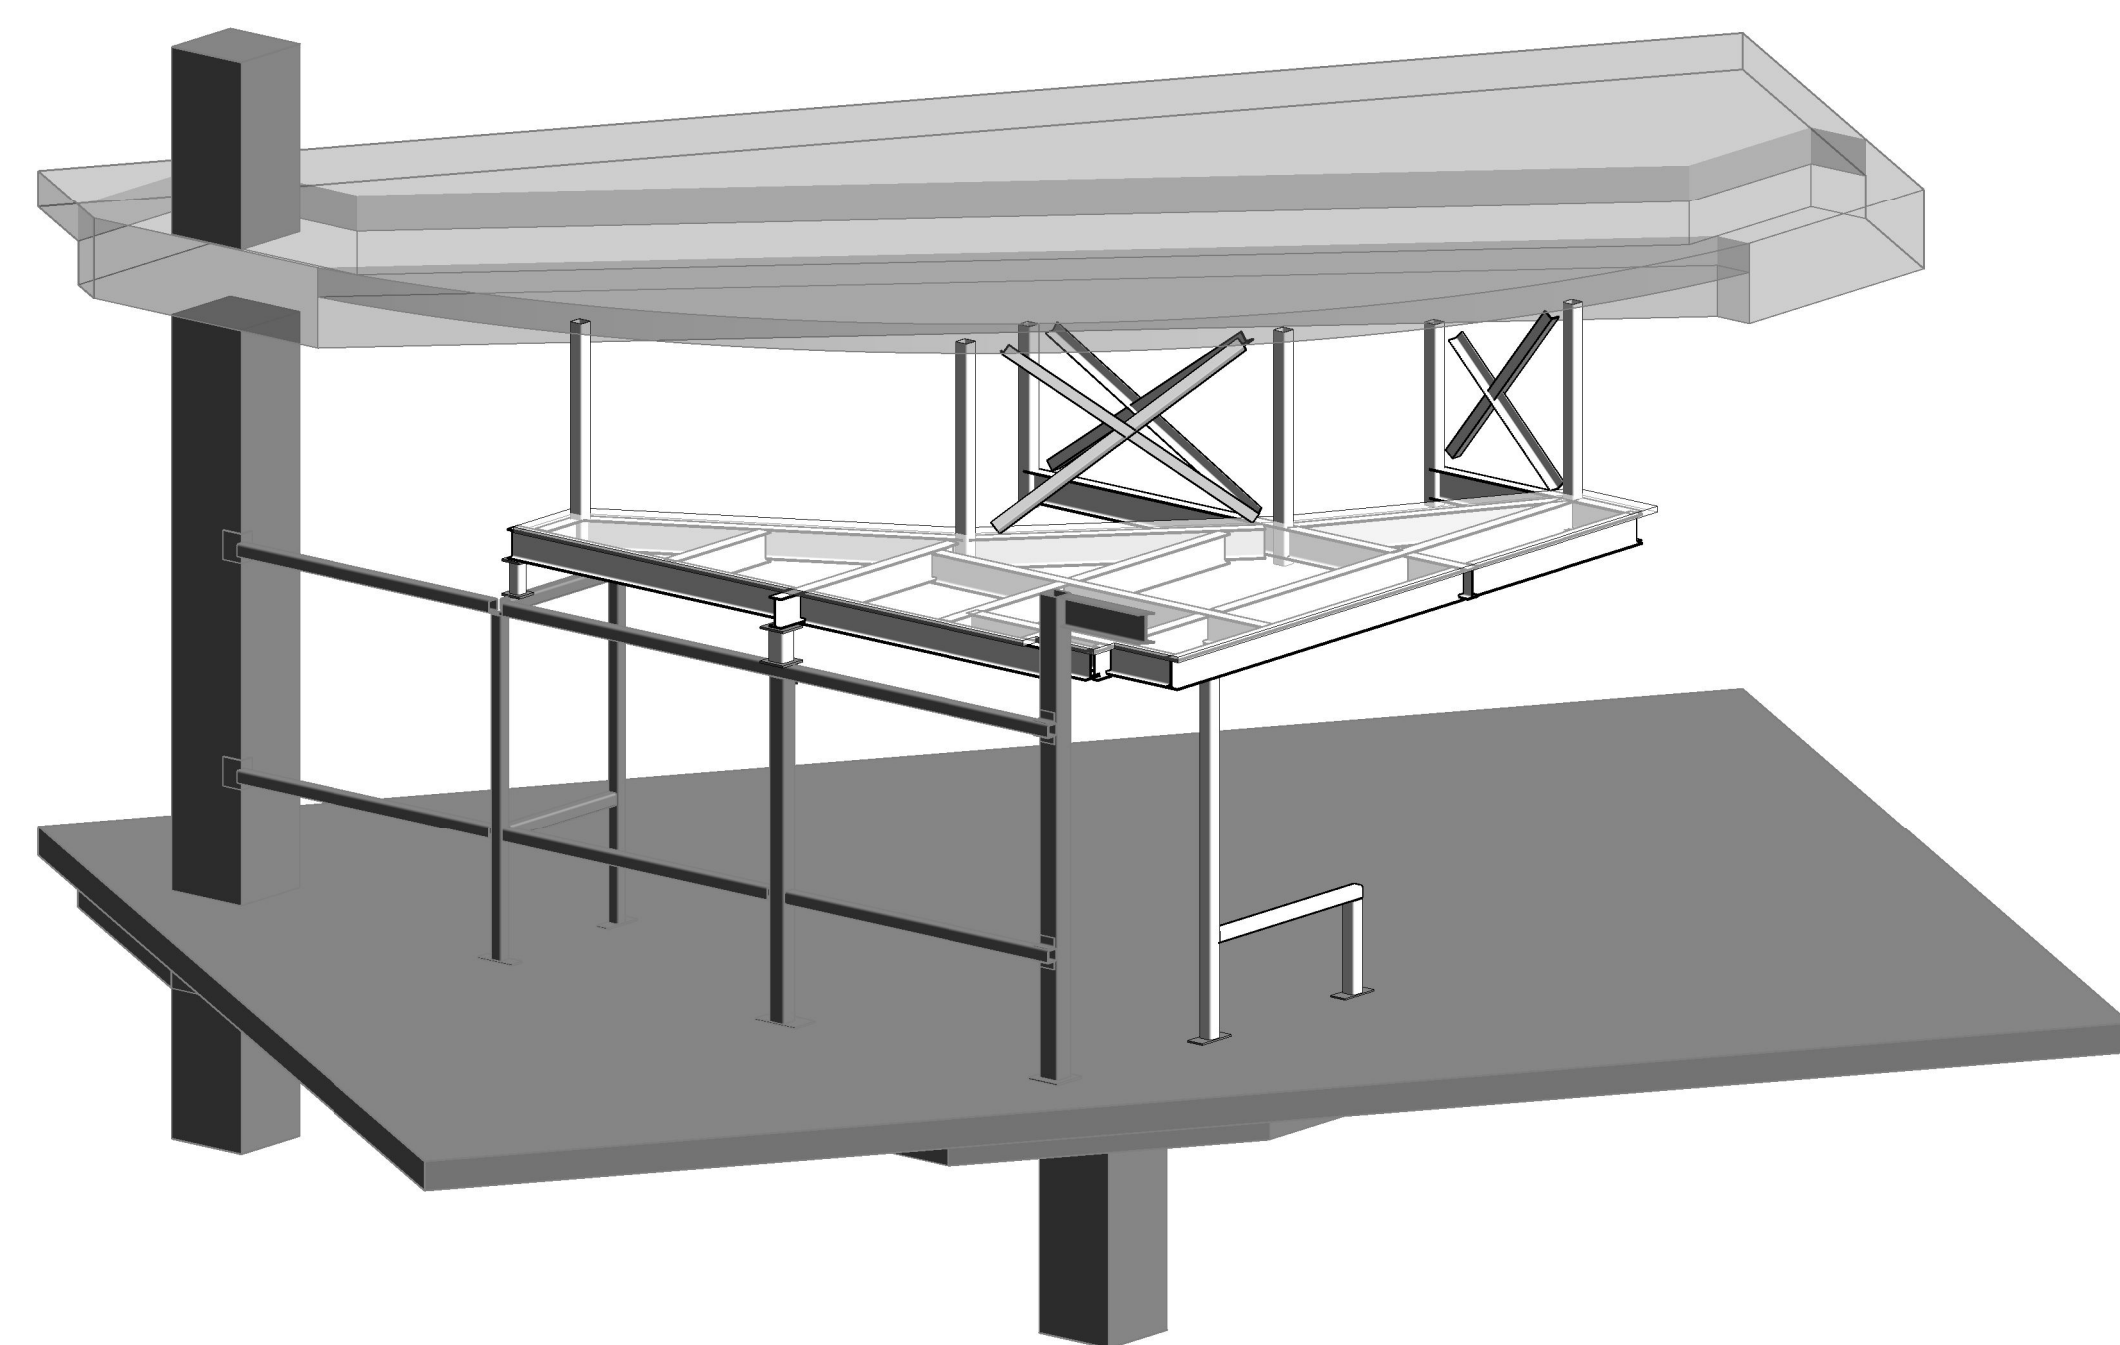

4 3D- Ceiling
S401/